

**BOILER  
PUMPS**

**APPLICATIONS**



Boiler



Dehumidifier

**PUMPING DISTANCE**

4.5 m



**WARRANTY**



Product Code:  
SK6N

Barcode:  
EAN 3308815081410



# SANICONDENS® Best Flat



**Low entry for floor standing boilers**

**Easy installation:**


Complete installation kit supplied with non-return valve, integrated neutralisation system and alarm pre-connection.



**Integrated neutralisation system to protect pipes from acid attacks. Complete and compact system.**

**Quiet unit.**


**SEMI-TRANSPARENT VIEW**

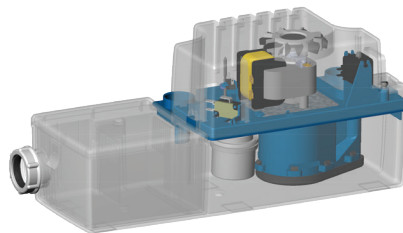

**TECHNICAL FEATURES**

Ø inlet	28 mm
Number of possible inlets	3
Ø discharge pipework	32 mm
Tank volume	3.5 l
Maximum flow	380 l/h
Maximum incoming water temperature	80°C
Max power of gas boiler	80 kW
Max power of oil boiler	50 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Electrical class	Single phase
IP rating	IP20
Weight	2 kg
Low noise level	< 45 dB(A)

**PUMP CURVE**

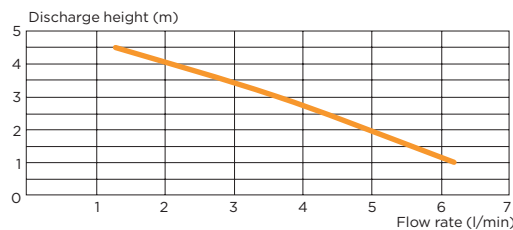

**PACKAGING**

SANICONDENS® Best Flat

Wall mounting and non-return valve supplied

**Delivered with:** fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (5m) internal diameter 10mm, and 1 power cable of 1.5m, 1 alarm cable 2 strands 1.5m.