




APPLICATIONS




PUMPING DISTANCE



WARRANTY



Product code :
EAN 3308815083681
SK6ECO

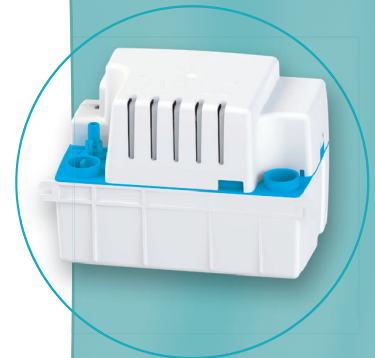

ORIGINE
FRANCE®
GARANTIE

BVCert. 6045364



**NEW
2021**

Sanicondens® Eco v02



Flexibility: can be used with gas or oil boilers (using Sanineutral or Sanineutral Mini) floor and wall, air conditioning units, dehumidifiers, refrigerated display cases.

Easy installation:

Complete installation kit with non-return valve for wall or floor mounting, 2 entry points.




Compact design

Quiet operation



SEMI-TRANSPARENT VIEW




PACKAGING

Sanicondens® Eco v02

Check valve supplied

Comes with; fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (5m) and 1 power cable - 1.5m.

PUMP CURVE

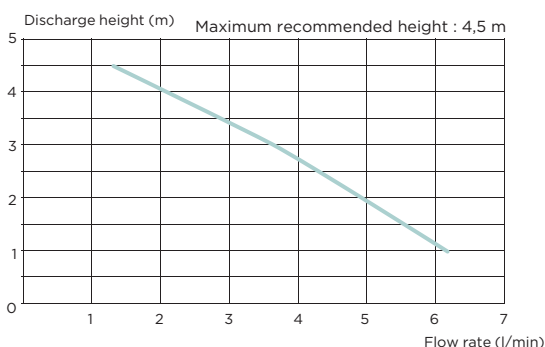

TECHNICAL FEATURES

Ø inlet	28 mm
Number of possible inlets	2
Ø discharge pipework	10 mm
Tank volume	2,2l
Maximum flow	6,2l/min
Maximum incoming water temperature	80 °C (S315 %)
Max power of gas boiler	50 kW
Max power of oil boiler	30 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Max current	0,52 A
Electrical class	Single phase
IP rating	IP20
Weight	2 kg
Low noise level	< 45 dB(A)