


Top outlet, high flow propeller pump. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel outer case, shaft, motor case, lower motor seal bearing housing and motor top cover. Brass impeller. Complete with 10 metres of power cable. No hose tail is supplied. Suitable for water features, drainage applications, clean and dirty water. All models can be made to work automatically, see pages 74-78 for control panels and 82-87 for float switches.

Features

- S/Steel Pump Body
- S/Steel Impeller
- Max Solids 5mm

Applications

- Clean Water
- Dirty Water

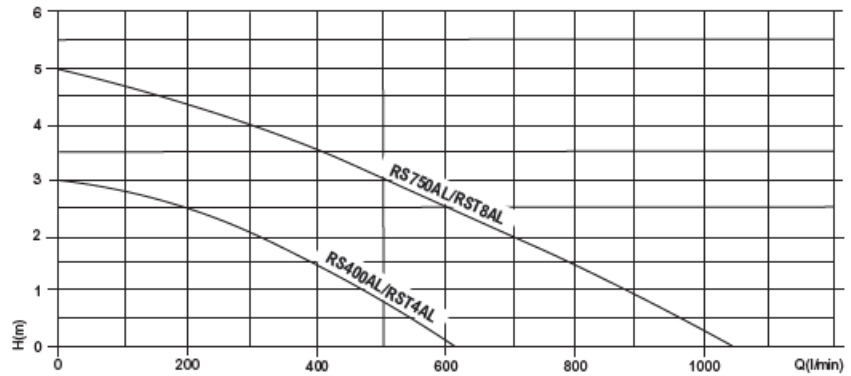

| MODEL | VOLT | OUTLET | LM/HM | Kw | AMP | H x W x L mm | Kg | CODE | PRICE |
|-----------|------|--------|--------|------|-----|-----------------|------|---------|-------|
| RS-400 AL | 230v | 4" | 620/3 | 0.4 | 2.8 | 475 x 250 x 250 | 27 | 011-500 | |
| RS-750 AL | 230v | 4" | 1055/5 | 0.75 | 6.8 | 555 x 250 x 250 | 27.5 | 011-501 | |
| RST-4 AL | 400v | 4" | 620/3 | 0.4 | 1.1 | 475 x 250 x 250 | 26 | 011-502 | |
| RST-8 AL | 400v | 4" | 1055/5 | 0.75 | 1.8 | 555 x 250 x 250 | 27 | 011-504 | |