

SUBMERSIBLE PUMPS

JST KB INDUSTRIAL HEAVY DUTY PUMPS

A



Top outlet providing maximum motor cooling for continuous operation. Built in agitator, specially designed to create a mixing action at the pump inlet causing the solids to move in suspension and to help keep the impeller and flow chamber clear and unclogged. Heavy duty Hi Chromium impeller, diffuser plate and agitator. Male BSP threaded outlets, direct online starting and 20 metres of power cable. 3000 RPM motors. Maximum liquid temperature 40°C.

Features

Cast Iron Pump Body
HICR Impeller
Max Solids 10mm

Applications

Heavy Duty
Sewage
Dirty Water
De watering
Sand/Sludge/Slurry

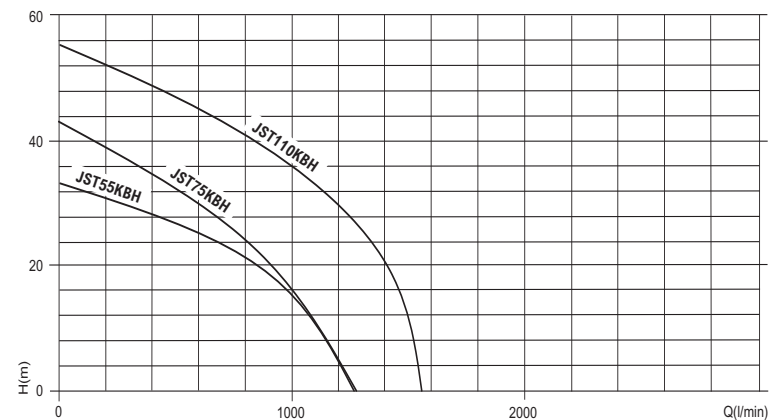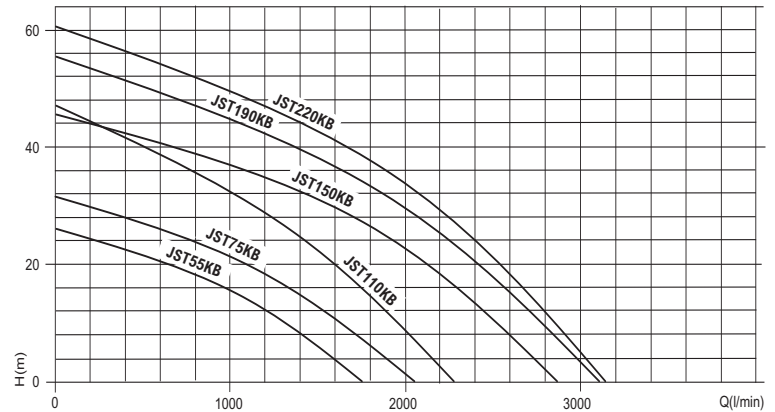

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
JST-55 KB	400v	4"	1755/26	5.5	11.5	750 x 345 x 350	120	011-122
JST-55 KBH	400v	3"	1260/33	5.5	11.5	720 x 345 x 350	120	011-124
JST-75 KB	400v	6"	2055/31.5	7.5	15.2	825 x 345 x 370	130	011-126
JST-75 KBH	400v	4"	1265/43	7.5	15.2	795 x 345 x 370	130	011-128
JST-110 KB	400v	6"	2280/47	11	22.7	890 x 345 x 370	150	011-130
JST-110 KBH	400v	4"	1545/55	11	22.7	860 x 345 x 370	150	011-132
JST-150 KB	400v	6"	2870/45.5	15	29.9	1002 x 365 x 540	250	011-134
JST-190 KB	400v	6"	3110/55.5	19	36.5	1002 x 365 x 540	255	011-136
JST-220 KB	400v	6"	3145/60.5	22	45.5	1002 x 365 x 540	260	011-138