

DRENO DNA VORTEX 2½"

E


The main components are fabricated in cast iron GG20. The Double mechanical seal in a back to back configuration located in the oil chamber guarantee long durability to the product. The DNA Series is used for sewage and waste water. Its wide channel permits the free passage of solids rendering it particularly useful in water treatment plants, domestic, municipal and farming applications. Complete with 10 metres of power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 65mm

Applications

Heavy Duty
Sewage

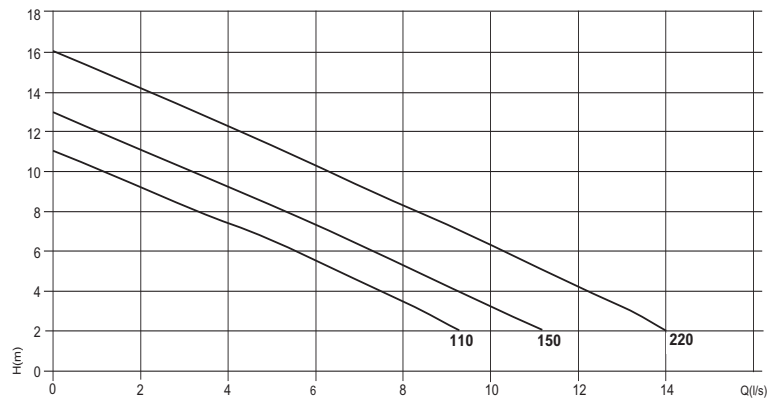

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
DNA 65-2/110 M	230v	DN65	540/11	1.1	7.4	411 x 223 x 270	28	200-0805
DNA 65-2/110 M EX	230v	DN65	540/11	1.1	7.4	411 x 223 x 270	28	200-0805EX
DNA 65-2/150 M	230v	DN65	660/13	1.5	9.9	411 x 223 x 270	30	200-0825
DNA 65-2/150 M EX	230v	DN65	660/13	1.5	9.9	411 x 223 x 270	30	200-0825EX
DNA 65-2/110 T	400v	DN65	540/11	1.1	2.7	411 x 223 x 270	28	200-0815
DNA 65-2/110 T EX	400v	DN65	540/11	1.1	2.7	411 x 223 x 270	28	200-0815EX
DNA 65-2/150 T	400v	DN65	660/13	1.5	3.4	411 x 223 x 270	30	200-0835
DNA 65-2/150 T EX	400v	DN65	660/13	1.5	3.4	411 x 223 x 270	30	200-0835EX
DNA 65-2/220 T	400v	DN65	840/16	2.2	5.2	520 x 223 x 270	30.5	200-0855
DNA 65-2/220 T EX	400v	DN65	840/16	2.2	5.2	520 x 223 x 270	30.5	200-0855EX