

# Saniwall Pro UP

Tiled version



## PRODUCT BENEFITS

- The support frame and macerator solution for use with a wall-hung WC (not provided)
- Easy maintenance: double access to the product
- Perfectly integrated with an elegant and contemporary design for tiled finish to incorporate any bathroom décor

## CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40/100 mm

- Direct access to the basket in case of blockage due to improper use of the device without dismantling the device and without emptying the tank




Single blade cutter

## PACK CONTAINS

Saniwall Pro Up, Grohe support frame, magnetic feet (tiled version), non-return valve, connectors

## CURVE

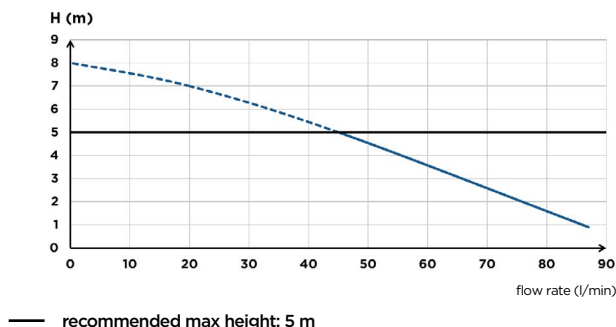

## TECHNICAL FEATURES

Number of inlets	3
External inlet diameter	40/100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35°C
Min. shower tray height	130 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Noise level	47 dB(A)
<b>Identification and logistics</b>	
Gross weight	30 kg
EAN code	3308815076096
Product code	6111

## DIMENSIONS

