

SURFACE MOUNTED PUMPS

PENTAX ULTRA S WRAS APPROVED CENTRIFUGAL PUMPS

E


Ultra S multistage pumps produce high flow and pressure in performance. Not self priming and should not be allowed to run dry. Stainless steel impeller, diffusers and pump body. Clean water only with no solids or abrasives. Example of use include water pressure booster systems, drinking water, washing and irrigation.

Features

WRAS Approved
High Pressure
High Flow

Applications

Drinking Water
Water Boosting
Booster Sets

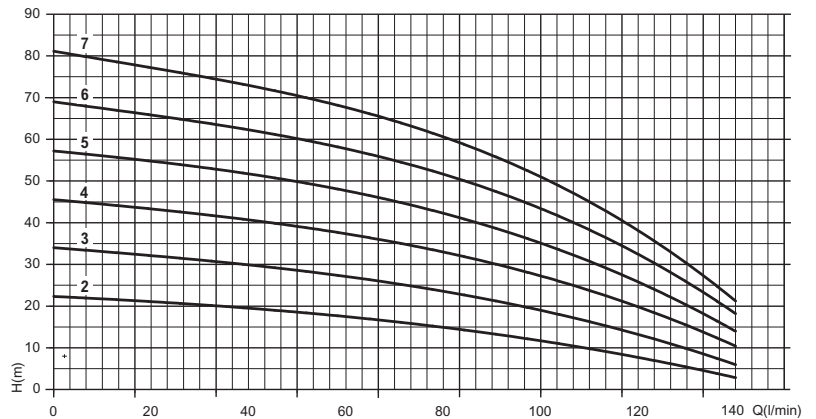

MODEL	VOLTAGE	INLET/OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
U 5S-70/2	230v	1" x 1"	140/22	0.51	2.6	195 x 178 x 333	7.7	1000-1365
U 5S-80/3	230v	1" x 1"	140/34	0.6	3.8	203 x 178 x 357	10.3	1000-1375
U 5S-120/4	230v	1" x 1"	140/45	0.9	4.9	203 x 178 x 380	12.1	1000-1385
U 5S-150/5	230v	1" x 1"	140/57	1.1	6.5	211 x 201 x 436	14.9	1000-1395
U 5S-150/5	110v	1" x 1"	140/57	1.39	13	211 x 201 x 436	14.9	1000-1397
U 5S-180/6	230v	1" x 1"	140/68	1.3	7.3	211 x 201 x 459	16.0	1000-1405
U 5S-200/7	230v	1" x 1"	140/81	1.5	8.7	211 x 201 x 483	18.1	1000-1415
U 5S-70/2T	400v	1" x 1"	140/22	0.51	1.1	195 x 178 x 333	7.7	1000-1370
U 5S-80/3T	400v	1" x 1"	140/34	0.6	1.4	203 x 178 x 357	10.3	1000-1380
U 5S-120/4T	400v	1" x 1"	140/45	0.9	2.4	203 x 178 x 380	12.1	1000-1390
U 5S-150/5T	400v	1" x 1"	140/57	1.1	2.7	211 x 201 x 436	14.9	1000-1400
U 5S-180/6T	400v	1" x 1"	140/68	1.3	3.	211 x 201 x 459	16.0	1000-1410
U 5S-200/7T	400v	1" x 1"	140/81	1.5	3.3	211 x 201 x 483	18.1	1000-1420